


D E C L A R A T I O N

I, Noboru Tanaka, residing at Kioicho Park Bldg. 7F, 3-6, Kioicho, Chiyoda-ku, Tokyo, Japan, hereby declare that I have a thorough knowledge of Japanese and English languages, and that the attached pages contains a correct translation into English of the application documents of Japanese Patent Application No. 2003-031315 on February 7, 2003 in the name of CANON KABUSHIKI KAISHA.

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statement were made with the knowledge that willful false statements and the like so made, are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Signed this 4th day of July, 2008



Noboru Tanaka

Translation of Japanese Patent Application No. 2003-031315

[Type of Document(s)]	Application for patent
[Reference Number]	251923
[Filing Date]	February 7, 2003
[Addressee]	Director-General of the Patent Office, Esq.
[International Patent Classification]	G06K 15/00
[Title of Invention]	DATA TRANSFER METHOD
[Number of Claim(s)]	1
[Inventor(s)]	
[Address/Domicile]	c/o CANON KABUSHIKI KAISHA 3-30-2, Shimomaruko, Ohta-ku, Tokyo, Japan
[Name]	Hitoshi Furukawa
[Applicant for Patent]	
[Identification Number]	000001007
[Name]	CANON KABUSHIKI KAISHA
[Agent]	
[Identification Number]	100076428
[Patent Attorney]	
[Name]	Yasunori Ohtsuka
[Telephone]	03-5276-3241
[Selected Agent]	
[Identification Number]	100112508
[Patent Attorney]	
[Name]	Jiro Takayanagi
[Telephone]	03-5276-3241
[Selected Agent]	
[Identification Number]	100115071
[Patent Attorney]	
[Name]	Yasuhiro Ohtsuka
[Telephone]	03-5276-3241
[Selected Agent]	
[Identification Number]	100116894
[Patent Attorney]	
[Name]	Shuji Kimura
[Telephone]	03-5276-3241

[Detail of Fee(s)]

[Register Number of

Prepayment]

003458

[Amount of Payment]

21000

[List of Attached Documents]

[Classification]

Specification

1

[Classification]

Drawing(s)

1

[Classification]

Abstract

1

[Number of General Power of

Attorney]

0102485

[Proof Required? Y/N]

Yes

[Type of the Document] Specification

[Title of the Invention] DATA TRANSFER METHOD

[What Is Claimed Is:]

[Claim 1] A data transfer method in an image forming
5 apparatus which comprises a nonvolatile memory and is
constituted by an engine section which forms an image
and a controller section which transmits image data to
the engine section, comprising steps of:

establishing synchronization of data transfer by
10 a predetermined control signal of serial communication
when data should be transferred from the controller
section to the engine section to rewrite the
nonvolatile memory; and

rewriting the nonvolatile memory by the data
15 transferred in synchronism.

[Detailed Description of the Invention]

[0001]

[Technical Field to Which the Invention Belongs]

The present invention relates to a technique for
20 transferring data by serial communication and rewriting
data stored in a nonvolatile memory by the transferred
data.

[0002]

[Prior Art]

25 In recent years, flash ROMs as a kind of
nonvolatile memories are becoming popular and replacing
ROMs (Read Only Memories) and EPROMs (Electrical

Programmable Read Only Memories) as recording media. A flash ROM is a nonvolatile memory that is electrically erasable and writable. Unlike a ROM or EPROM, the flash ROM can rewrite data without exchanging elements.

5 To rewrite data, a method of rewriting a flash ROM by connecting a flash writer or a method of rewriting data by using a dedicated rewrite program is generally used.

[0003]

The rewrite method using a dedicated flash ROM
10 rewrite program will be described by using a normal printing apparatus as an example. A normal printing apparatus is constituted by a video controller that converts image information into bitmap data and a printer engine that forms an image on the basis of the
15 pixel data and transfers and fixes the image on a printing medium. An example of the interface between the video controller and the printer engine will be described below.

[0004]

20 Fig. 1 is a block diagram showing an interface (to be referred to as a video interface hereinafter) that connects a video controller 10 and printer engine 20 in a printing apparatus. Fig. 2 is a table showing a list of video interface signals. Referring to
25 Fig. 2, "output" indicates output from the printer engine 20 to the video controller 10, and "input" indicates input from the video controller 10 to the

printer engine 20.

[0005]

The printer engine 20 includes an engine
controller (CPU 30, RAM 31, and flash ROM 32) that
5 controls the printer engine. The engine controller
exchanges signals between the printer engine 20 and the
video controller 10 and controls the printer engine 20.

[0006]

A beam detection (/BD) signal shown in Fig. 2 is
10 a main-scanning horizontal sync signal in the printer
engine 20. The video controller 10 sends a video
(/VDO) signal corresponding to one main-scanning line
in synchronism with the trailing edge of the /BD
signal.

15 [0007]

A ready (/RDY) signal indicates that the printer
engine 20 is set in a printable state by a print start
command (/PRNT signal is "true") from the video
controller 10. Conditions that make the /RDY signal
20 "true" are that the heat roller in the fixing unit has
an appropriate temperature (a temperature that is
sufficient for fixing a toner image on a paper sheet),
no recording paper sheets have jammed, the polygon
mirror normally rotates at a specific rotational speed,
25 and the /BD signal is normally output at a specific
period.

[0008]

A top of page (/TOP) signal is a sub-scanning print sync signal in the printer engine 20. The video controller 10 sets the sub-scanning image print start position in synchronism with the trailing edge of the /TOP signal. In this example, the paper feed sensor is arranged such that the time until the printing paper sheet reaches the transfer roller after detection of the leading edge of a printing paper sheet equals the time until the latent image formed on the photosensitive body by a laser beam reaches the transfer roller as the photosensitive drum rotates. For this reason, upon detecting that the paper feed sensor signal (PFSNS) from the paper feed sensor has changed to "true", the printer engine 20 immediately sets the /TOP signal to "true" for 1 sec.

[0009]

A status (/STS) signal is 16-bit serial information transmitted from the printer engine 20 to the video controller 10. This signal is called a status.

[0010]

A condition change report (/CCRT) signal notifies the video controller 10 that a status in the printer, which is designated in advance, has changed.

25 [0011]

With a print (/PRNT) signal, the video controller 10 commands the printer engine 20 to start the printing

operation. In a continuous print mode, the signal means the continuation of printing operation.

[0012]

A controller power ready (/CPRDY) signal
5 indicates that power is supplied to the video controller 10, and the video controller 10 is completely initialized and is capable of transmitting/receiving a command or status to/from the printer engine 20.

10 [0013]

The video (/VDO) signal indicates an image signal to be printed by the printer engine 20. This image signal is obtained by causing the video controller 10 to convert image code data received from the host
15 computer into dot data.

[0014]

A command (/CMD) signal is 16-bit serial information transmitted from the video controller 10 to the printer engine 20. This signal is called a
20 command.

[0015]

A clock (/SCLK) signal is a serial data sync clock used in transmitting the /CMD signal or /STS signal.

25 [0016]

With a reset (/RESET) signal, the video controller 10 requests the printer engine 20 to

initialize the printer. When this signal is LOW level for a specific time or more, the printer engine 20 initializes the engine.

[0017]

5 Commands from the video controller 10 to the printer engine 20 and statuses from the printer engine 20 to the video controller 10, which are transmitted/received by the above-described serial communication, will be described next.

10 [0018]

 In 16-bit data transmitted/received by the serial communication, the MSB is defined as the most significant bit of the transmission/reception data, and the 15th bit from the MSB is defined as the least
15 significant bit of the transmission/reception data. The LSB is defined as an odd parity bit.

[0019]

 In the above-described data format, when a 1-word (16-bit) command is issued from the video controller 10
20 to the printer engine 20 in synchronism with the /SCLK signal, the printer engine 20 returns a 1-word status to the video controller 10. This command contains a status request command to check the status (state) of the printer engine 20 and an execution command that
25 commands the printer engine 20 to execute a certain operation.

[0020]

In the operation for rewriting the flash ROM, generally, rewrite data is transferred from the video controller 10 to the RAM 31 of the printer engine 20 by serial communication by using the /CMD, /STS, and /SCLK signals. The CPU 30 of the printer engine 20 rewrites the data in the flash ROM 32 by the data in the RAM 31 in accordance with a rewrite program.

[0021]

[Problems That the Invention Is to Solve]

10 In the prior art, however, when the flash ROM 32 should be rewritten, the program for the normal image forming operation in the flash ROM 32 mounted in the printer engine 20 is erased, and the program on the flash ROM to be rewritten cannot be executed in the
15 rewrite mode. For this reason, the rewrite program must be executed by executing a program on a ROM that is not to be rewritten. Alternatively, the rewrite program must be bitmapped and executed on the RAM 31 to rewrite the flash ROM.

20 [0022]

The capacity of the RAM 31 mounted in the printer engine 20 is generally smaller than the ROM capacity. For this reason, the entire rewrite program cannot be downloaded at once to the RAM 31 to rewrite the flash
25 ROM. The program must be rewritten while downloading the program to the RAM 31. Hence, a special operation different from the normal image forming operation must

be performed.

[0023]

The time necessary for rewriting the flash ROM 32 includes the time to transfer data to be used for the
5 rewrite to the RAM 31 of the printer engine 20 and the
rewrite time by the program. The time to transfer data
to be used for the rewrite to the printer engine 20
occupies the most part.

[0024]

10 The present invention has been made to solve the
above problems, and has as its object to shorten the
data transfer time in serial communication between the
controller section and the engine section of an image
forming apparatus.

15 [0025]

[Means of Solving the Problems]

In order to achieve the above object, according
to an aspect of the present invention, there is
provided a data transfer method in an image forming
20 apparatus which comprises a nonvolatile memory and is
constituted by an engine section which forms an image
and a controller section which transmits image data to
the engine section, comprising steps of: establishing
synchronization of data transfer by a predetermined
25 control signal of serial communication when data should
be transferred from the controller section to the
engine section to rewrite the nonvolatile memory; and

rewriting the nonvolatile memory by the data transferred in synchronism.

[0026]

[Embodiments]

5 The embodiments of the present invention will be described below in detail with reference to the accompanying drawings.

[0027]

10 The sizes and layout of constituent elements and the flow charts of processing operations described in the embodiments do not limit the scope of the invention unless otherwise specified.

[0028]

15 In the embodiments, a printing apparatus will be exemplified as an image forming apparatus. However, the present invention is not limited to this and can also be applied to a copying machine or facsimile apparatus that executes data transfer by serial communication between a controller section and an
20 engine section.

[0029]

Fig. 3 is a block diagram showing the arrangement of a printing apparatus according to an embodiment. As shown in Fig. 3, the printing apparatus has a
25 controller section 310 and an engine section 320. In the controller section 310, a CPU 301 executes a control program stored in a ROM 303 and receives image

information (code data) described in a page description language (PDL) from an external device (host computer) through an external interface 330. The received image information is input to an image processing section
5 304. The image processing section 304 stores the image information in a RAM 305 and analyzes the image information. A RAM 302 is a memory on which a work area and registers to be used by the CPU 301 in executing processing are defined. A ROM 306 stores
10 font data corresponding to the value of the image information.

[0030]

The image processing section 304 reads out corresponding font data from the ROM 306, converts the
15 received image information into dot video data to be printed by the engine section 320, and stores the video data in a frame memory 307. When video data of one page is stored in the frame memory 307, the CPU 301 sends a print command to the engine section 320 through
20 a video interface 340. In addition, the CPU 301 sends the video data stored in the frame memory 307 to the engine section 320 in synchronism with the main- and sub-scanning sync signals from the engine section 320.

[0031]

25 The engine section 320 incorporates a control section 321 constituted by a CPU or microprocessor (MPU), a RAM, and a flash ROM, like the printer engine

shown in Fig. 1. The microprocessor controls the image forming process in accordance with the control program of the engine section, which is stored in the flash ROM. The control program written in the flash ROM is
5 changed when control of the engine section 320 is changed. The rewrite of the flash ROM will be described later.

[0032]

The video interface 340 that connects the
10 controller section 310 and engine section 320 of the printing apparatus according to this embodiment is the same as the interface shown in Fig. 1. Signals exchanged between the controller section 310 and the engine section 320 are also the same as those shown in
15 Fig. 2, and a description thereof will be omitted.

[0033]

Fig. 4 is a sectional view showing the structure of the printing apparatus according to this embodiment. The same reference numerals as in Fig. 3 denote parts
20 having the same functions in Fig. 4. A laser beam printer will be described as a printing apparatus main body 400 in this embodiment.

[0034]

Referring to Fig. 4, an optical unit 401
25 modulates a laser beam in accordance with the video data sent through the video interface 340. A deflection mirror 402 reflects the laser beam output

from the optical unit 401. The laser beam reflected by the deflection mirror 402 is scanned on a photosensitive drum 403 by a rotary polygon mirror (not shown) so that an electrostatic image is formed on the photosensitive drum 403. A charger 404 uniformly charges the photosensitive drum 403. A developer 405 develops the electrostatic image on the photosensitive drum 403 to a toner image.

[0035]

10 A transfer charger 406 transfers the toner image on the photosensitive drum 403 to a printing paper sheet. A cleaner 407 recovers the toner remaining on the photosensitive drum 403 after transfer. An upper paper feed roller 409a feeds a printing paper sheet
15 stored in an upper cassette 408a. A lower paper feed roller 409b feeds a printing paper sheet stored in a lower cassette 408b. Paper conveyance rollers 410 convey the fed printing paper sheet to the transfer position. A TOP sensor 411 detects the
20 presence/absence of the fed printing paper sheet. A fixer 412 fixes the toner image transferred to the printing paper sheet on the printing paper sheet by heating and pressing. A discharge sensor 413 detects the presence/absence of a paper sheet discharged from
25 the fixer 412. A discharge tray 414 receives the discharged printing paper sheet.

[0036]

[First Embodiment]

Procedures for rewriting control program codes
(to be referred to as program codes hereinafter) stored
in the flash ROM in an engine section 320 through a
5 video interface 340 that connects a controller section
310 and the engine section 320 in the above-described
printing apparatus will be described.

[0037]

Fig. 5 is a flow chart showing an operation for
10 rewriting program codes stored in the flash ROM in the
engine section 320. First, in step S501, when a
command to rewrite the program codes in the engine
section 320 is input from a host computer through an
external interface 330 of the controller section 310 or
15 from the operation panel (not shown) of the controller
section 310, a CPU 301 in the controller section 310
sends a command that designates a program code rewrite
mode to a control section 321 of the engine section 320
through the video interface 340.

20 [0038]

In step S502, when a status representing that the
program code rewrite mode is set is received from the
control section 321 of the engine section 320, the CPU
301 sends, to the control section 321, a command that
25 designates the write start address of the flash ROM in
which the program codes should actually be rewritten.
In step S503, the CPU 301 of the controller section 310

transmits the program code data transmitted from the host computer to the control section 321 of the engine section 320 as a command by serial communication.

[0039]

5 Instead of transmitting the program code data while designating one address in correspondence with one program code data in the flash ROM, a predetermined number of data are transmitted from the address designated in step S502 described above.

10 [0040]

 In step S504, it is determined whether the predetermined number of data are transmitted. If NO in step S504, the flow returns to step S503 to transmit program code data. The above-described operation is
15 repeated until the predetermined number of data are transmitted. When it is determined that the predetermined number of data are transmitted, the program code data transmission is ended.

[0041]

20 The above-described data transmission is done through a serial communication path (video interface 340). A /CCRT signal is used as a signal that establishes synchronization in the serial communication. In the normal image forming operation,
25 the control section 321 in the engine section 320 notifies the controller section 310 by using the /CCRT signal that the state in the engine section 320 has

changed. More specifically, if the /CCRT signal is OFF (HIGH level) at the time of data transmission, the controller section 310 determines that the engine section 320 cannot receive data, and does not execute data transmission. If the /CCRT signal is ON (LOW level), the controller section 310 determines that the engine section 320 can receive data, and executes data transmission. With this operation, synchronization of serial communication is established.

10 [0042]

 An operation will be described next, in which while the controller section 310 and engine section 320 maintain synchronization by serial communication in steps S503 and S504 in Fig. 5 described above, the controller section 310 transmits flash ROM program code write data as a command, and the control section 321 in the engine section 320 rewrites the program codes in the flash ROM by the received data.

 [0043]

20 First, details of processing for transmitting the program code data in steps S503 and S504 after the CPU 301 in the controller section 310 designates the program code rewrite mode in step S501 shown in Fig. 5 described above and designates the program code write start address in step S502 will be described.

 Synchronization control at the time of data transmission by the above-described /CCRT signal is the

same as described above, and a description thereof will be omitted.

[0044]

Fig. 6 is a flow chart showing data transmission processing in the controller section 310 according to the first embodiment. In step S601, the CPU 301 in the controller section 310 transmits a flash ROM erase command to the control section 321 in the engine section 320. In step S602, the CPU 301 receives a status corresponding to the erase command from the control section 321 in the engine section 320.

[0045]

In step S603, the CPU 301 transmits, as a command, the data of program codes for rewriting the flash ROM. In step S604, the CPU 301 receives a status corresponding to the command. In steps S605 to S608, error recovery processing is executed on the basis of error information recorded in the received status.

[0046]

If transfer error information is received in step S605, the flow advances to step S606 to execute command resending processing. If the number of times of transfer error information reception does not exceed a predetermined number of times of retry, the flow returns to step S603 to resend the command. If the number of times of retry exceeds the predetermined number, the processing is ended.

[0047]

If write error information is received in step S607, the flow advances to step S608. If the number of times of reception does not exceed a predetermined
5 number of times of retry, the flow returns to step S601 to execute processing for transmitting the write data again. If the number of times of reception exceeds the predetermined number of times of retry, the processing is ended.

10 [0048]

In step S609, it is determined whether the write data corresponding to a predetermined number of data are transmitted as commands. If NO in step S609, the flow returns to step S603 to repeat the above-described
15 processing until all data are transmitted.

[0049]

Processing will be described next, in which the control section 321 in the engine section 320 rewrites the flash ROM while establishing synchronization of
20 serial communication with respect to the controller section 310 without storing, in the RAM, the program codes of the flash ROM, which are sent from the controller section 310 by serial communication.

[0050]

25 This processing is flash ROM rewrite processing which is executed by the control section 321 in the engine section 320 in correspondence with the

above-described data transmission processing by the controller section 310 shown in Fig. 6 described above. The above-described /CCRT signal is ON (LOW level) in the initial state. When a command that designates the program code rewrite mode is received from the
5 controller section 310, the /CCRT signal controls reception of addresses and data while executing the above-described synchronization processing.

[0051]

10 Fig. 7 is a flow chart showing flash ROM rewrite processing in the engine section 320. In step S701, the control section 321 in the engine section 320 receives the data of program codes sent from the controller section 310 as a command by serial
15 communication. In step S702, the above-described /CCRT signal is changed to the OFF state (HIGH level) to notify the controller section that the control section is not ready for reception of the next command. In step S703, a status is returned to the controller
20 section 310. In step S704, program code data erase or write processing is executed in accordance with the command received in step S701 described above.

[0052]

In the first embodiment, error information of a transfer error or write error is recorded in a status
25 and returned.

[0053]

In step S705, the /CCRT signal is changed to the ON state (LOW level) to notify the controller section 310 that the control section 321 is ready for reception of the next command in serial communication. It is
5 determined whether write data corresponding to a predetermined number of data are received. If NO in step S706, the flow returns to step S701 to repeat the above-described processing until all data are received.

[0054]

10 As described above, when the /CCRT signal is used for synchronization control, the controller section 310 can determine that the engine section 320 can reliably receive a command. For this reason, the wait time until the next serial communication can be shortened.

15 [0055]

Hence, the communication speed in transferring the codes of the control program of the flash ROM can be increased.

[0056]

20 Fig. 8 is a timing chart showing an image forming operation and a flash ROM rewrite operation. Fig. 8 shows the timing chart of command/status transmission/reception by serial communication and the /CCRT signal in the two operations. A status of the
25 engine section 320 is returned in correspondence with a command from the controller section 310.

[0057]

As shown in Fig. 8, in the normal image forming operation, when the internal state of the engine section 320 changes, the above-described /CCRT signal changes to the OFF state (HIGH level). The controller section 310 that has received the /CCRT signal in the OFF state transmits a command that requests the state of the engine section 320. The control section 321 in the engine section 320 records the state of the engine section 320, which corresponds to the request command, in the status and returns the status.

[0058]

In the flash ROM write operation, the control section 321 in the engine section 320 uses the /CCRT signal as serial communication data reception preparation completion notification signal from the controller section 310. When the /CCRT signal changes from the OFF state to the ON state, the controller section 310 sends a command. The engine section 320 receives predetermined program code data as a command and writes the data in the flash ROM.

[0059]

[Second Embodiment]

The second embodiment of the present invention will be described next in detail with reference to the accompanying drawings.

[0060]

In the above-described first embodiment, the

controller section 310 acquires error information of a transfer error or write error as a status from the engine section 320. In the second embodiment, the above-described /CCRT signal is used even for error
5 detection.

[0061]

The arrangement of a printing apparatus according to the second embodiment is the same as that of the first embodiment shown in Figs. 3 and 4, and a
10 description thereof will be omitted.

[0062]

In addition, processing in steps S501 and S502 shown in Fig. 5, in which control program codes (to be referred to as program codes hereinafter) stored in the
15 flash ROM in an engine section 320 are rewritten through a video interface 340 that connects a controller section 310 and the engine section 320, is the same as in the first embodiment, and a description thereof will be omitted. Furthermore, as in the first
20 embodiment, the /CCRT signal is used as a signal that controls synchronization of serial communication.

[0063]

Processing as a characteristic feature of the second embodiment will be described here, in which
25 instead of causing the engine section 320 to returning a status in correspondence with a command transmitted from the controller section 310 to the engine section

320, the /CCRT signal used for synchronization control of serial communication is caused to function as error information to be sent to the controller section 310.

[0064]

5 Fig. 9 is a flow chart showing flash ROM rewrite processing in the engine section 320. In step S901, a control section 321 in the engine section 320 receives the data of program codes sent from the controller section 310 as a command by serial communication. In
10 step S902, the above-described /CCRT signal is changed to the OFF state (HIGH level) to notify the controller section that the data is received, and the control section is not ready for reception of the next data. In step S903, it is determined by normal parity check
15 whether the received command has a data error. If YES in step S903, the flow advances to step S904. The processing waits for a time until the controller section 310 detects the communication error. When the time has elapsed, the flow advances to step S907.

20 [0065]

 If NO in step S903, the flow advances to step S905 to execute program code data erase or write processing in accordance with the command received in step S901 described above. In step S906, it is
25 determined whether an erase or write error has occurred in step S905. If YES in step S906, the flow advances to step S909. The processing waits for a time until

the controller section 310 detects the occurrence of the error. When the time has elapsed, the flow advances to step S907. If NO in step S906, the flow advances to step S907 to change the /CCRT signal to the
5 ON state (LOW level) to notify the controller section 310 that the control section 321 is ready for reception of the next command. It is determined in step S908 whether rewrite data corresponding to a predetermined number of data are received. If NO in step S908, the
10 flow returns to step S901 to repeat the above-described processing until all data are received.

[0066]

As described above, when the /CCRT signal is used as a sync signal of serial communication, the
15 processing for causing the engine section 320 to return a status in correspondence with a command from the controller section 310 can be omitted. For this reason, as compared to data transfer by only normal serial communication, the data communication amount can
20 be reduced, and data can be transferred at a high speed.

[0067]

Processing will be described next, in which when flash ROM rewrite data is transmitted from the
25 controller section 310 to the engine section 320, an error that has occurred in the engine section 320 is detected by using the /CCRT signal. In the second

embodiment, in the flash ROM rewrite mode, the controller section 310 detects whether the processing for causing the engine section 320 to rewrite the program is being normally executed by monitoring the
5 change time of the /CCRT signal.

[0068]

Fig. 10 is a flow chart showing error detection processing by the controller section 310. In step S1001, a CPU 301 in the controller section transmits a
10 command to the control section 321 in the engine section 320. In steps S1002 and S1003, the controller section waits until the /CCRT signal from the control section 321 in the engine section 320 changes to the ON state (LOW level) within specified time 1. The time
15 necessary for the flash ROM erase/rewrite in the engine section 320 is specified by each flash ROM. The specified time 1 is the sum of the time necessary for data transmission/reception and the minimum time necessary for the flash ROM erase/rewrite operation in
20 the flash ROM erase/rewrite mode.

[0069]

When the control section 321 in the engine section 320 changes the /CCRT signal to the ON state within the specified time 1, the controller section 310
25 determines that a data error has occurred in command transmission. The flow returns to step S1001 to retransmit the same command. If the /CCRT signal does

not change to the ON state even when the specified time
1 has elapsed in step S1003, the flow advances to step
S1004. In steps S1004 and S1005, the controller
section waits until the /CCRT signal changes to the ON
5 state within specified time 2 that is the maximum wait
time for monitoring the change of the /CCRT signal. If
the /CCRT signal does not change to the ON state even
when the specified time 2 has elapsed, it is determined
that the control of the engine section 320 is not
10 correctly executed, and the processing is ended.

[0070]

If the /CCRT signal changes to the ON state
within the specified time 2 in step S1005, the flow
advances to step S1006 to check whether specified time
15 3 which is the sum of the time necessary for data
transmission/reception and the maximum time necessary
for the flash ROM erase/rewrite operation has not
elapsed yet. If the specified time 3 has elapsed, it
is determined in the flash ROM erase/write operation
20 that the flash ROM erase/write has failed or in the
operation for receiving a control command, data, or
address that a data error has occurred in command
transmission. The flow returns to step S1001 to
retransmit the same command. If the specified time 3
25 has not elapsed yet, it is determined that data
transfer and command processing have normally ended.
The flow advances to step S1007 to check whether all

commands are transmitted. If NO in step S1007, the flow returns to step S1001 to repeat the above-described processing for transmitting the next command.

5 [0071]

As described above, the controller section 310 can detect a data communication error or data processing error that has occurred in the engine section 320 by using the /CCRT signal.

10 [0072]

The specified time in which the controller section 310 monitors the /CCRT signal may be changed depending on the size of data to be written in the flash ROM, the size of the block to be erased, or
15 whether transfer of rewrite data is progressing.

[0073]

Fig. 11 is a timing chart of serial communication between the controller section 310 and the engine section 320 when the flash ROM of the engine section
20 320 according to the second embodiment is to be rewritten.

[0074]

As described above, according to the embodiment, when program code data is transferred from the
25 controller section 310 to the engine section 320 to rewrite the flash ROM (nonvolatile memory) of the control section 321 in the engine section 320,

processing related to rewrite data transfer in serial communication can be simplified, and the rewrite of the nonvolatile memory can be executed at a high speed.

[0075]

5 [Other Embodiment]

The present invention may be applied to a system constituted by a plurality of devices (e.g., a host computer, an interface device, a reader, a printer, and the like) or an apparatus comprising a single device
10 (e.g., a copying machine, a facsimile apparatus, or the like).

[0076]

The object of the present invention is achieved even by supplying a recording medium which records
15 software program codes for implementing the functions of the above-described embodiments to the system or apparatus and causing the computer (or a CPU or MPU) of the system or apparatus to read out and execute the program codes stored in the recording medium.

20 [0077]

In this case, the program codes read out from the recording medium implement the functions of the above-described embodiments by themselves, and the recording medium which stores the program codes
25 constitutes the present invention.

[0078]

As the recording medium for supplying the program

codes, for example, a floppy disk (registered trademark), hard disk, optical disk, magnetooptical disk, CD-ROM, CD-R, magnetic tape, nonvolatile memory card, ROM, or the like can be used.

5 [0079]

 The functions of the above-described embodiments are implemented not only when the readout program codes are executed by the computer but also when the operating system (OS) running on the computer performs
10 part or all of actual processing on the basis of the instructions of the program codes.

 [0080]

 The functions of the above-described embodiments are also implemented when the program codes read out
15 from the recording medium are written in the memory of a function expansion board inserted into the computer or a function expansion unit connected to the computer, and the CPU of the function expansion board or function expansion unit performs part or all of actual
20 processing on the basis of the instructions of the program codes.

 [0081]

 [Effect of the Invention]

 As described above, according to the invention,
25 the data transfer time in serial communication between the controller section and the engine section of the image forming apparatus can be shortened.

[Brief Description of the Drawings]

[Fig. 1]

Fig. 1 is a block diagram showing an interface
that connects a video controller 10 and printer engine
5 20 in a printing apparatus;

[Fig. 2]

Fig. 2 is a table showing a list of video
interface signals;

[Fig. 3]

10 Fig. 3 is a block diagram showing the arrangement
of a printing apparatus according to an embodiment;

[Fig. 4]

Fig. 4 is a sectional view showing the structure
of the printing apparatus according to the embodiment;

15 [Fig. 5]

Fig. 5 is a flow chart showing an operation for
rewriting program codes stored in a flash ROM in an
engine section 320;

[Fig. 6]

20 Fig. 6 is a flow chart showing data transmission
processing in a controller section 310 according to the
first embodiment;

[Fig. 7]

Fig. 7 is a flow chart showing flash ROM rewrite
25 processing in the engine section 320;

[Fig. 8]

Fig. 8 is a timing chart showing an image forming

operation and a flash ROM rewrite operation;

[Fig. 9]

Fig. 9 is a flow chart showing flash ROM rewrite processing in an engine section 320 according to the
 5 second embodiment;

[Fig. 10]

Fig. 10 is a flow chart showing error detection processing by a controller section 310; and

[Fig. 11]

10 Fig. 11 is a timing chart of serial communication between the controller section 310 and the engine section 320 when the flash ROM of the engine section 320 according to the second embodiment is to be rewritten.

15 [Description of the Reference Numerals]

301	CPU
302	RAM
303	ROM
304	IMAGE PROCESSING SECTION
20 305	RAM
306	ROM
307	FRAME MEMORY
310	CONTROLLER SECTION
320	ENGINE SECTION
25 321	CONTROL SECTION
330	EXTERNAL INTERFACE (I/F)
340	VIDEO INTERFACE (I/F)

[Type of the Document] Abstract

[Abstract]

[Problem] To shorten the data transfer time in serial communication between the controller section and the engine section of an image forming apparatus.

[Solving Means] In an image forming apparatus which includes a nonvolatile memory and is constituted by an engine section 320 which forms an image and a controller section 310 which transmits image data to the engine section 320 through a video interface 340, synchronization of data transfer is established by a predetermined control signal that controls serial communication when data should be transferred from the controller section 310 to the engine section 320 to rewrite the nonvolatile memory, and the nonvolatile memory is rewritten by the data transferred in synchronism.

[Selected Drawing] Fig. 3

[Type of the Document] Drawings

図 1

Fig. 1

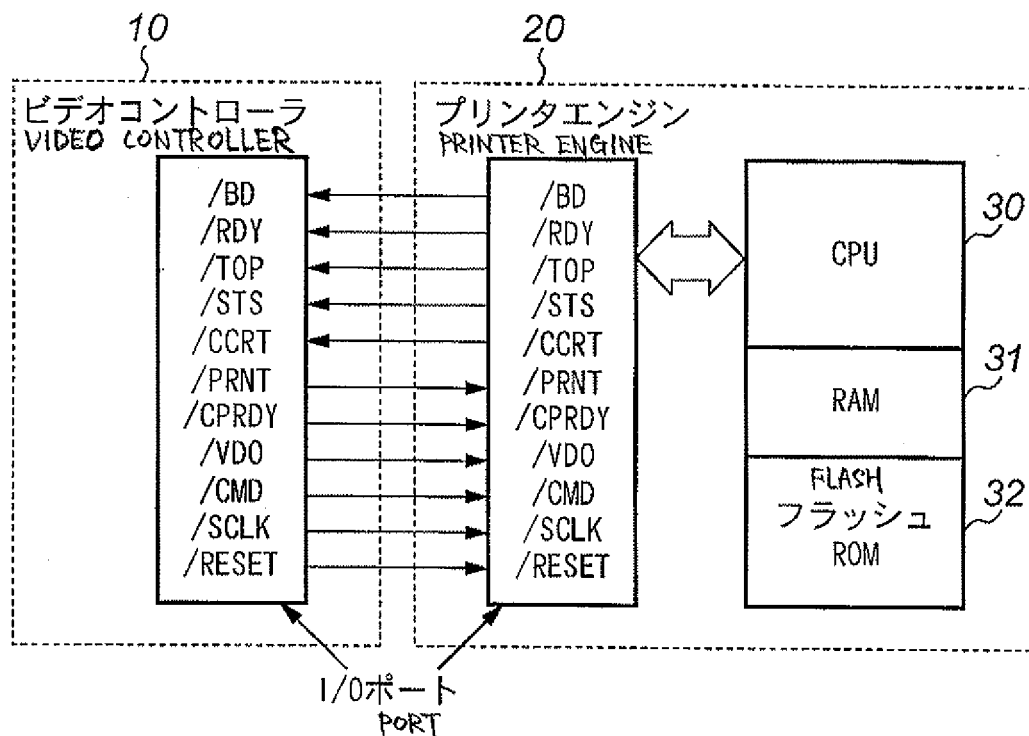


図 2

Fig. 2

SIGNAL NAME	信号名	略称	性格	
BEAM DETECTION	ビーム検知	/BD	出力(パルス)	OUTPUT (PULSE)
READY	レディ	/RDY	出力(レベル)	OUTPUT (LEVEL)
TOP OF PAGE	トップオブページ	/TOP	出力(パルス)	OUTPUT (PULSE)
STATUS	ステータス	/STS	出力(レベル)	OUTPUT (LEVEL)
CONDITION CHANGE REPORT	コンディションチェンジレポート	/CCRT	出力(レベル)	OUTPUT (LEVEL)
PRINT	プリント	/PRNT	入力(レベル)	INPUT (LEVEL)
CONTROLLER POWER READY	コントローラパワーレディ	/CPRDY	入力(レベル)	INPUT (LEVEL)
VIDEO	ビデオ	/VDO	入力(レベル)	INPUT (LEVEL)
COMMAND	コマンド	/CMD	入力(レベル)	INPUT (LEVEL)
CLOCK	クロック	/SCLK	入力(パルス)	INPUT (PULSE)
RESET	リセット	/RESET	入力(レベル)	INPUT (LEVEL)

図 3
Fig. 3

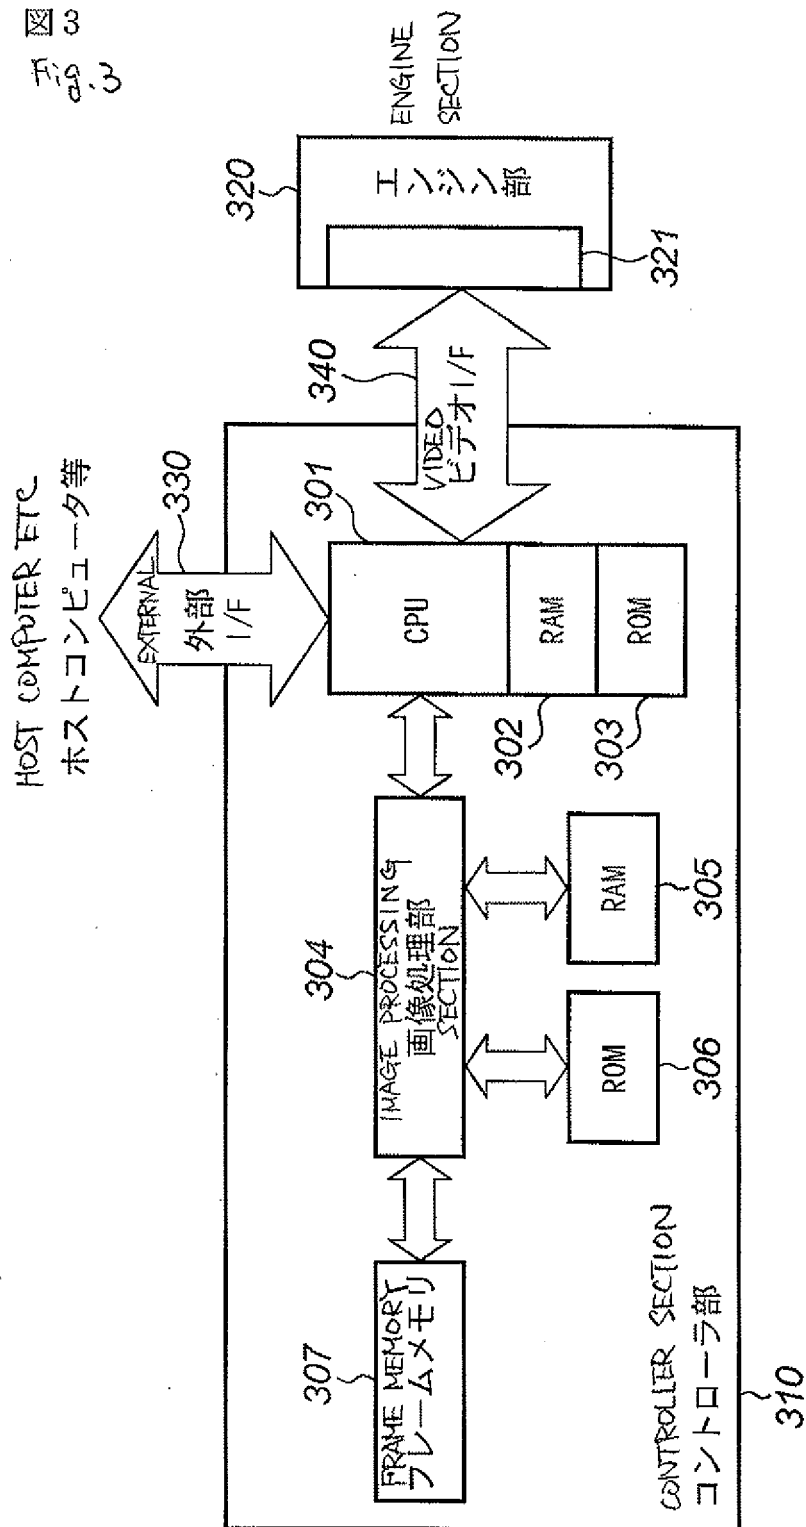


图4
Fig.4

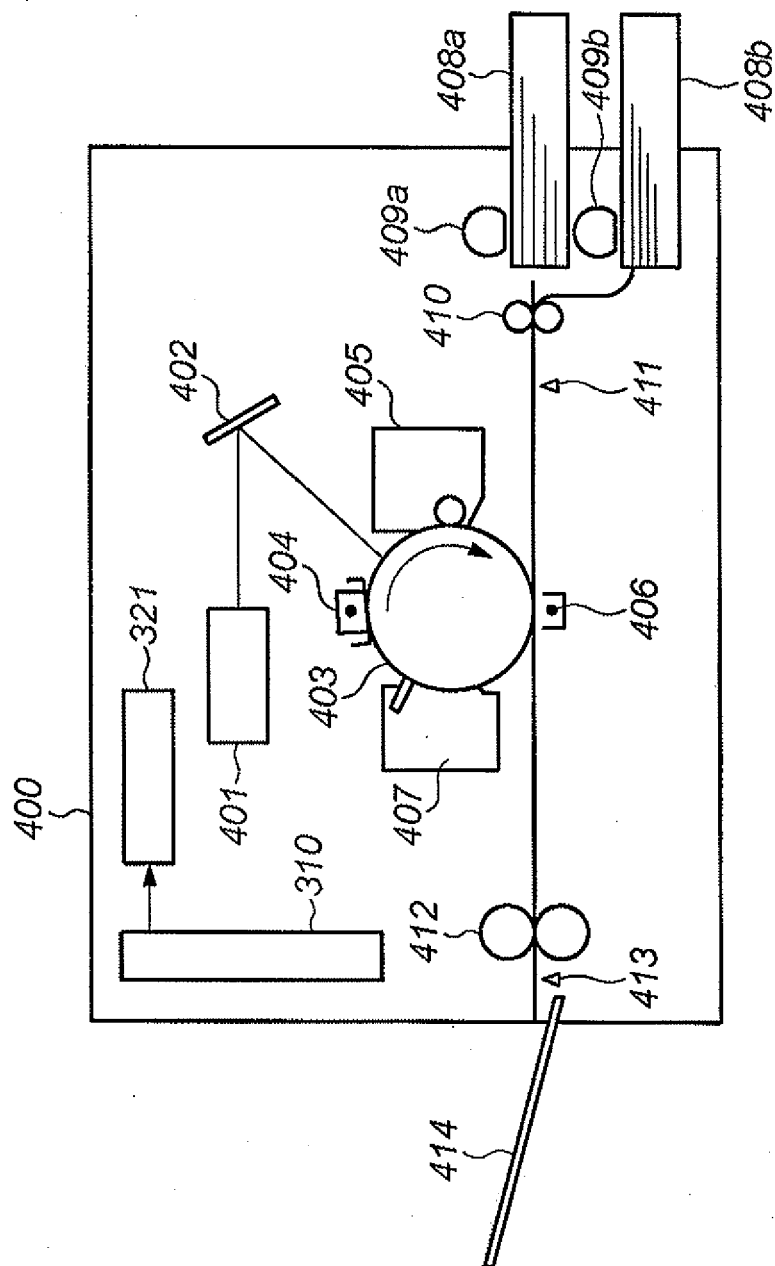


図5
Fig.5

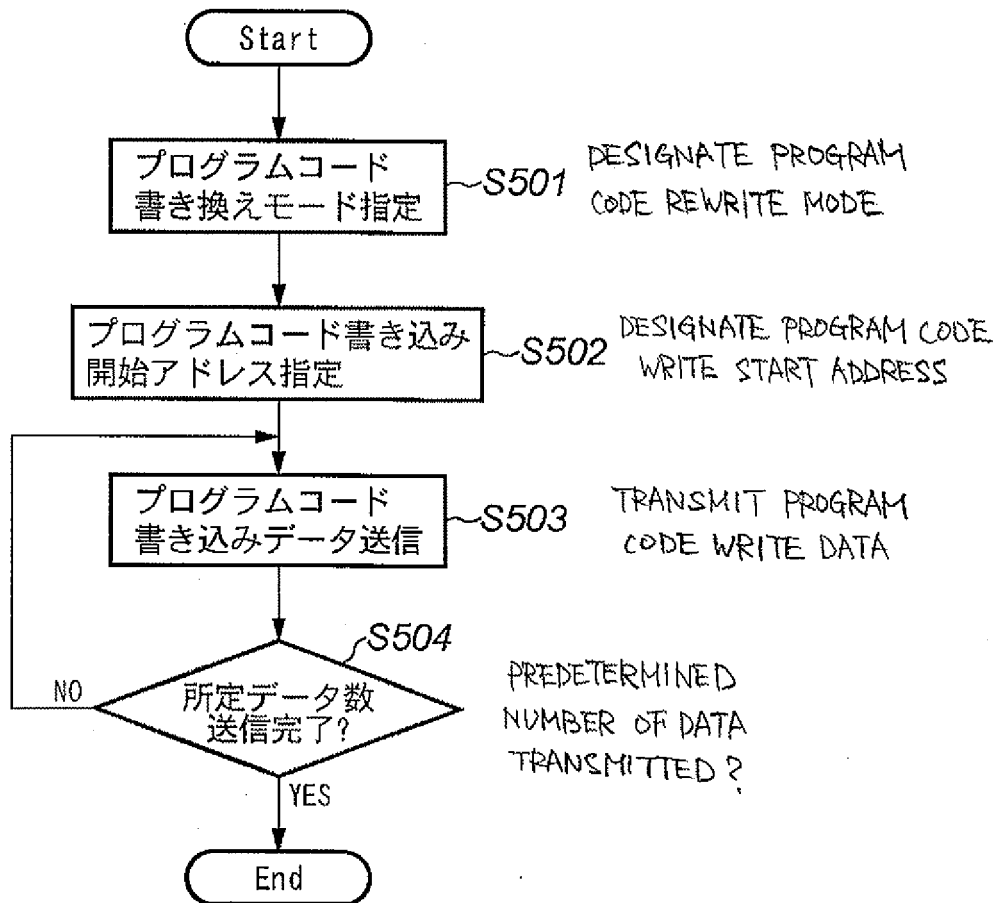


図 6
Fig. 6

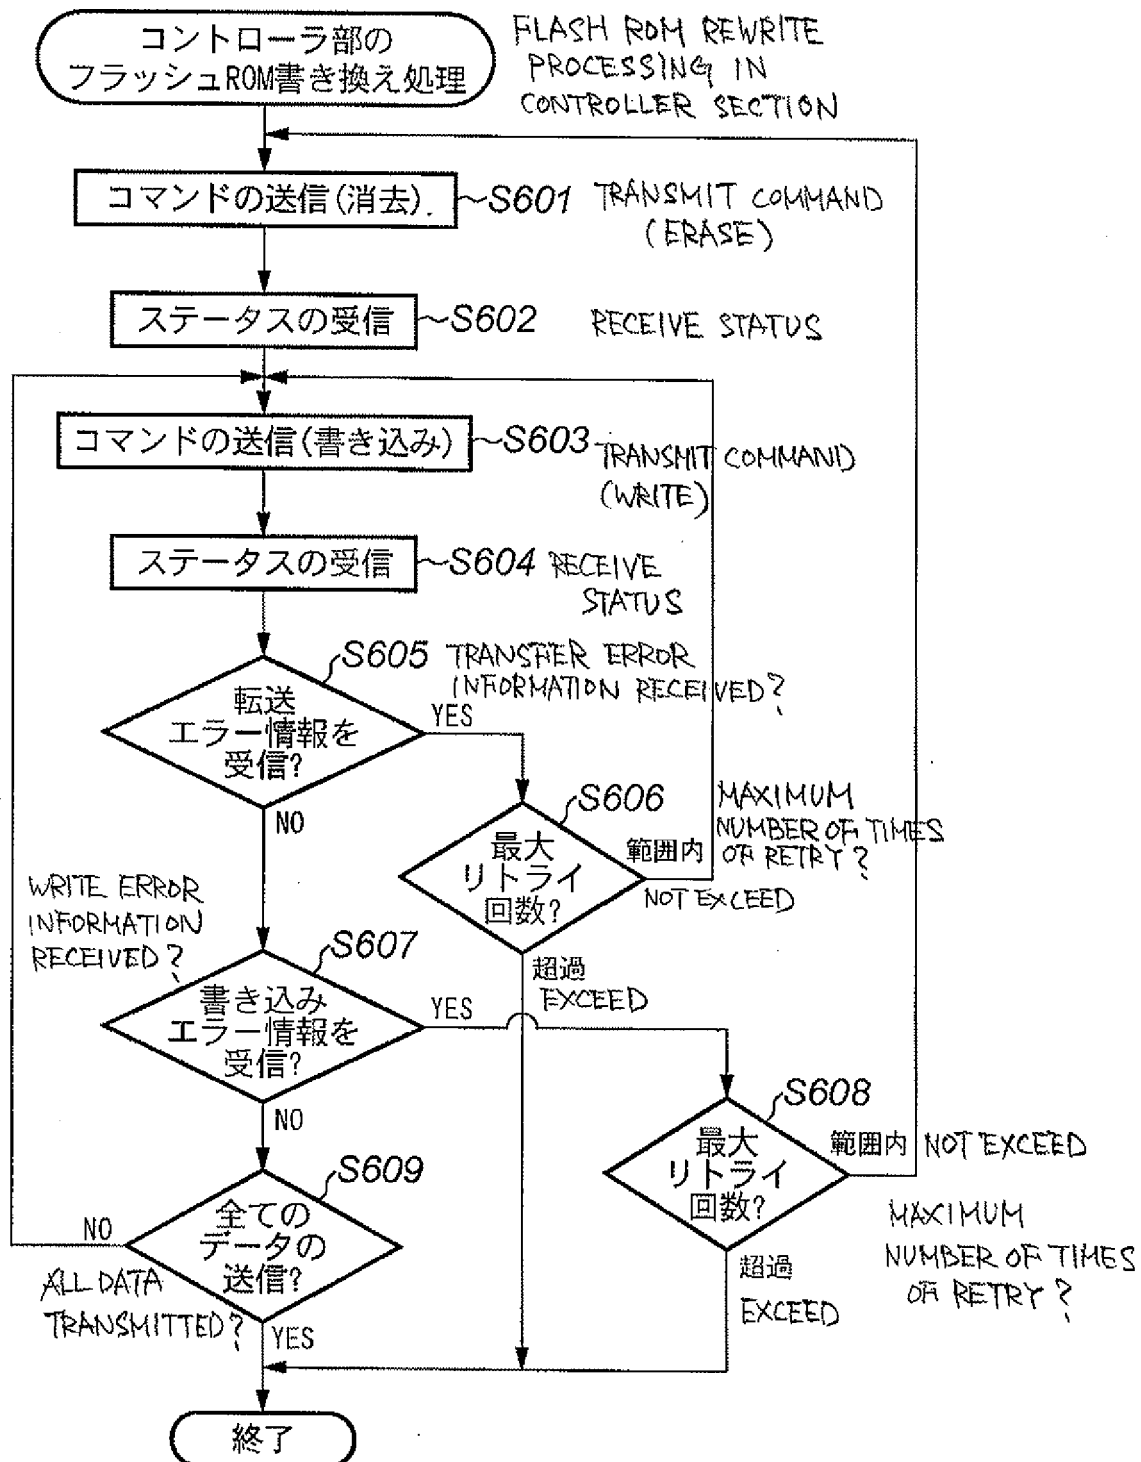


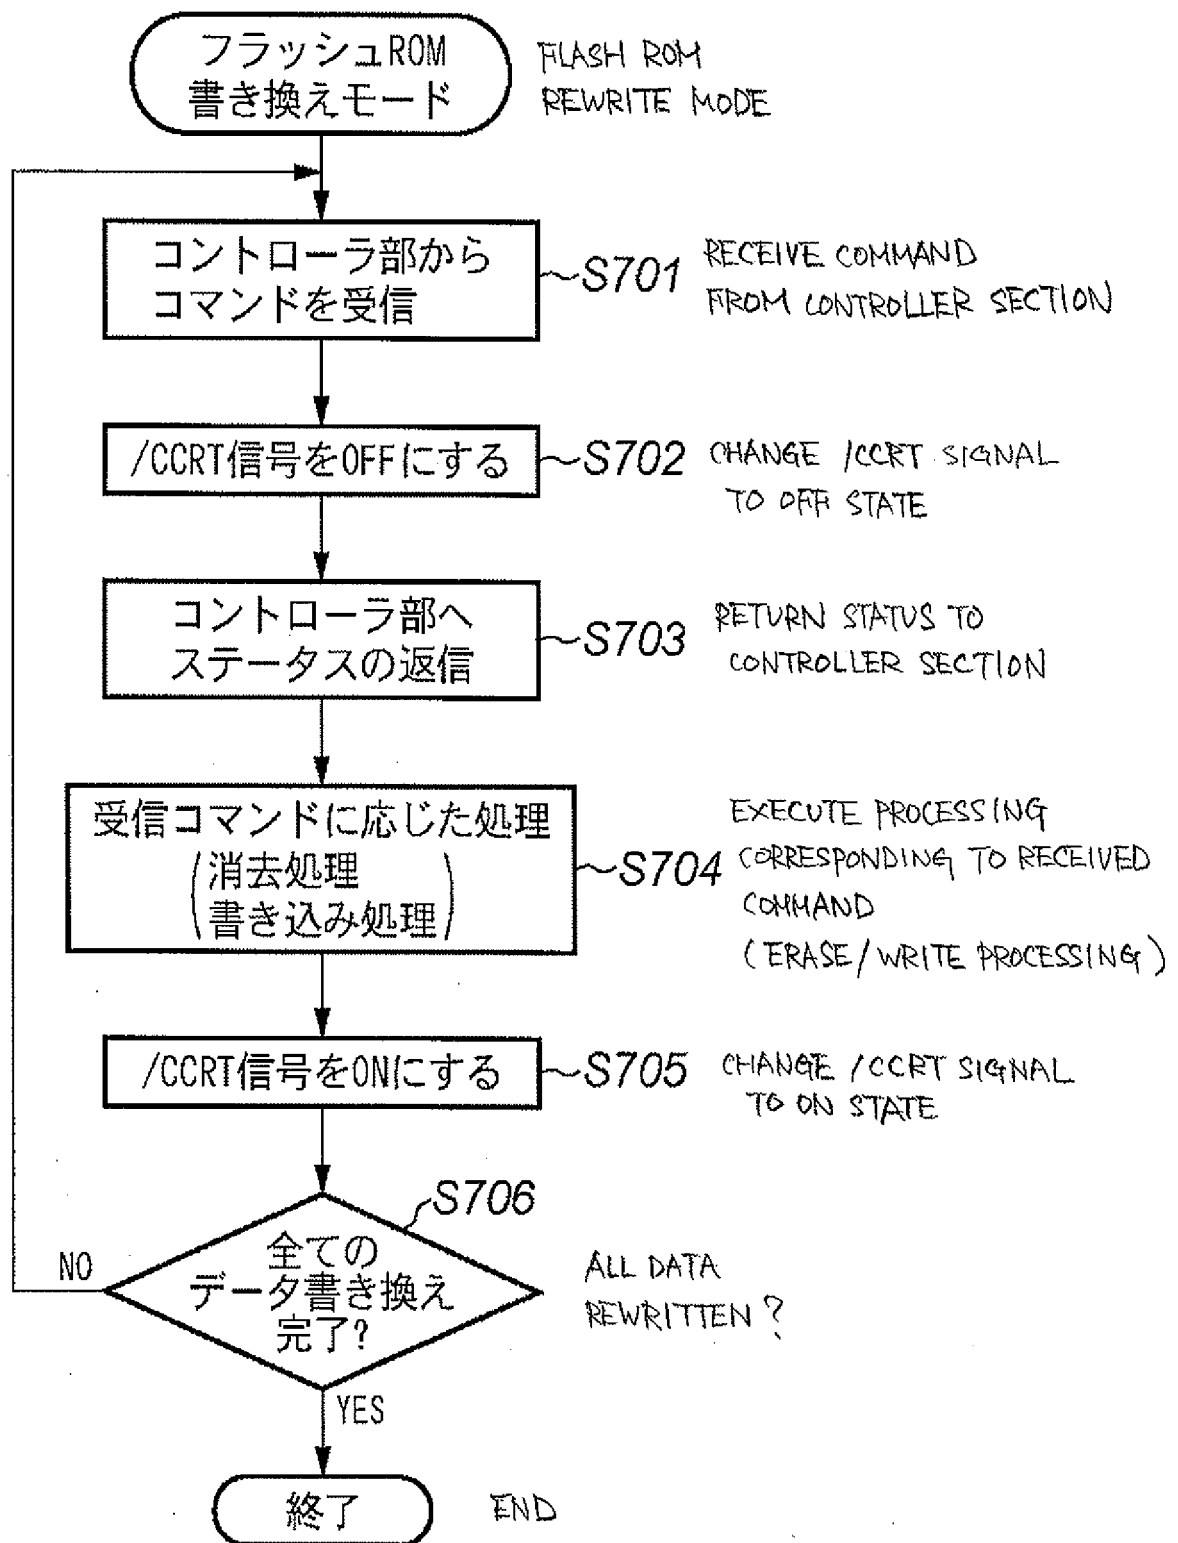
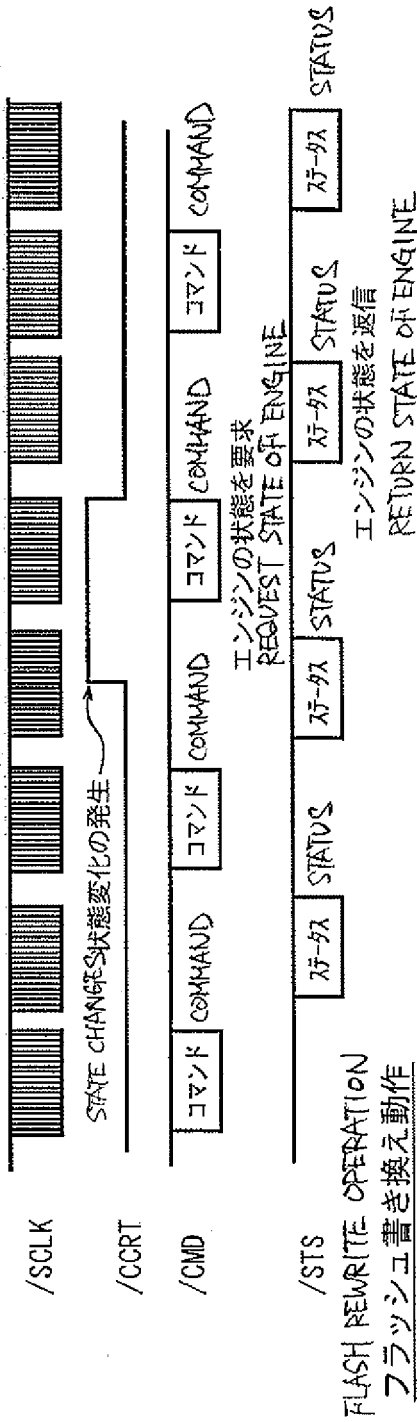
図7
Fig.7

図 8
F. 8
9. 8

IMAGE FORMING OPERATION
画像形成動作



FLASH REWRITE OPERATION
フラッシュ書き換え動作

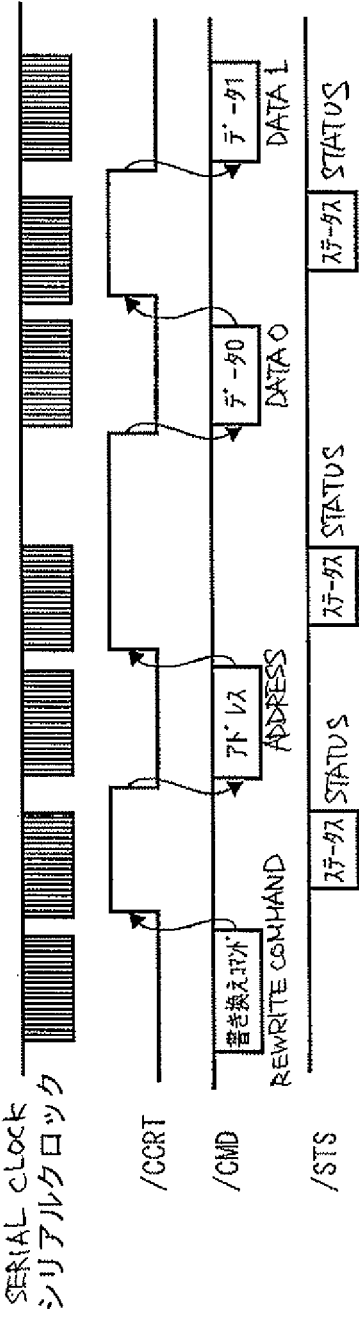


図9
Fig. 9

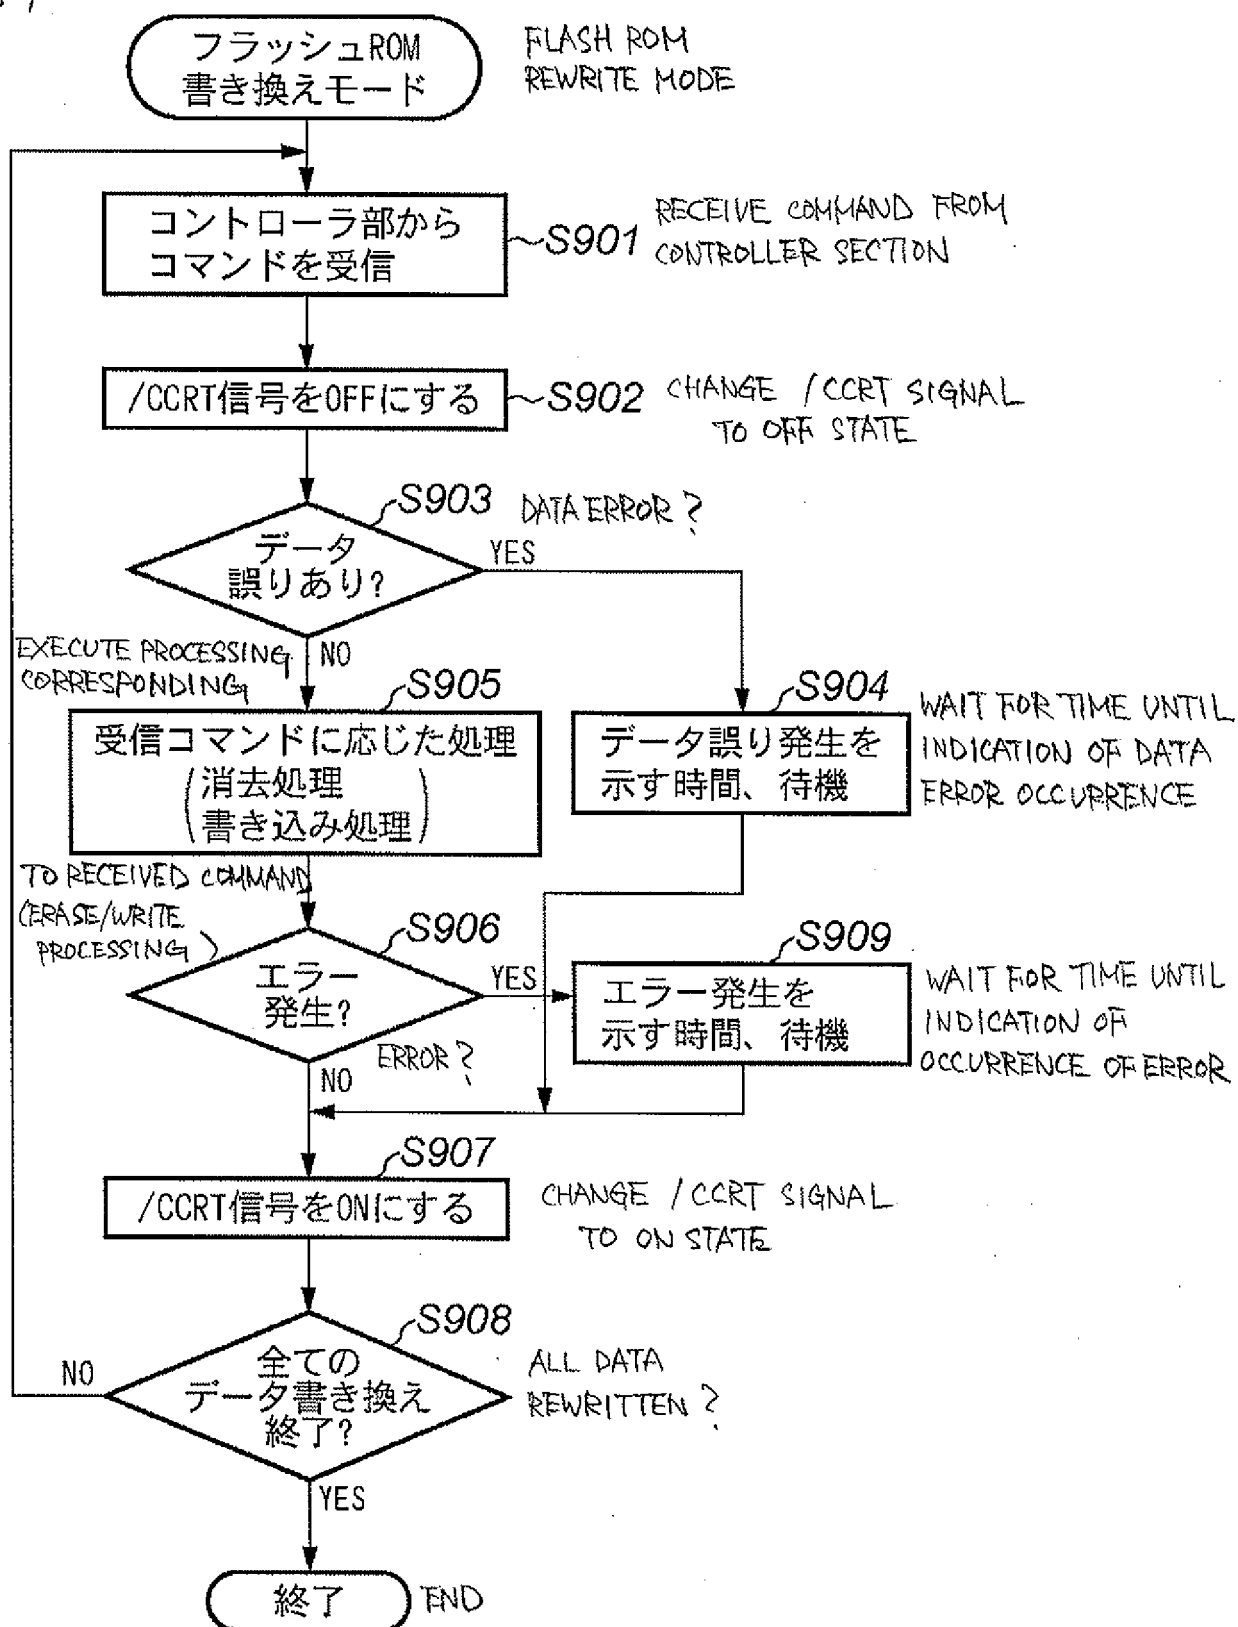
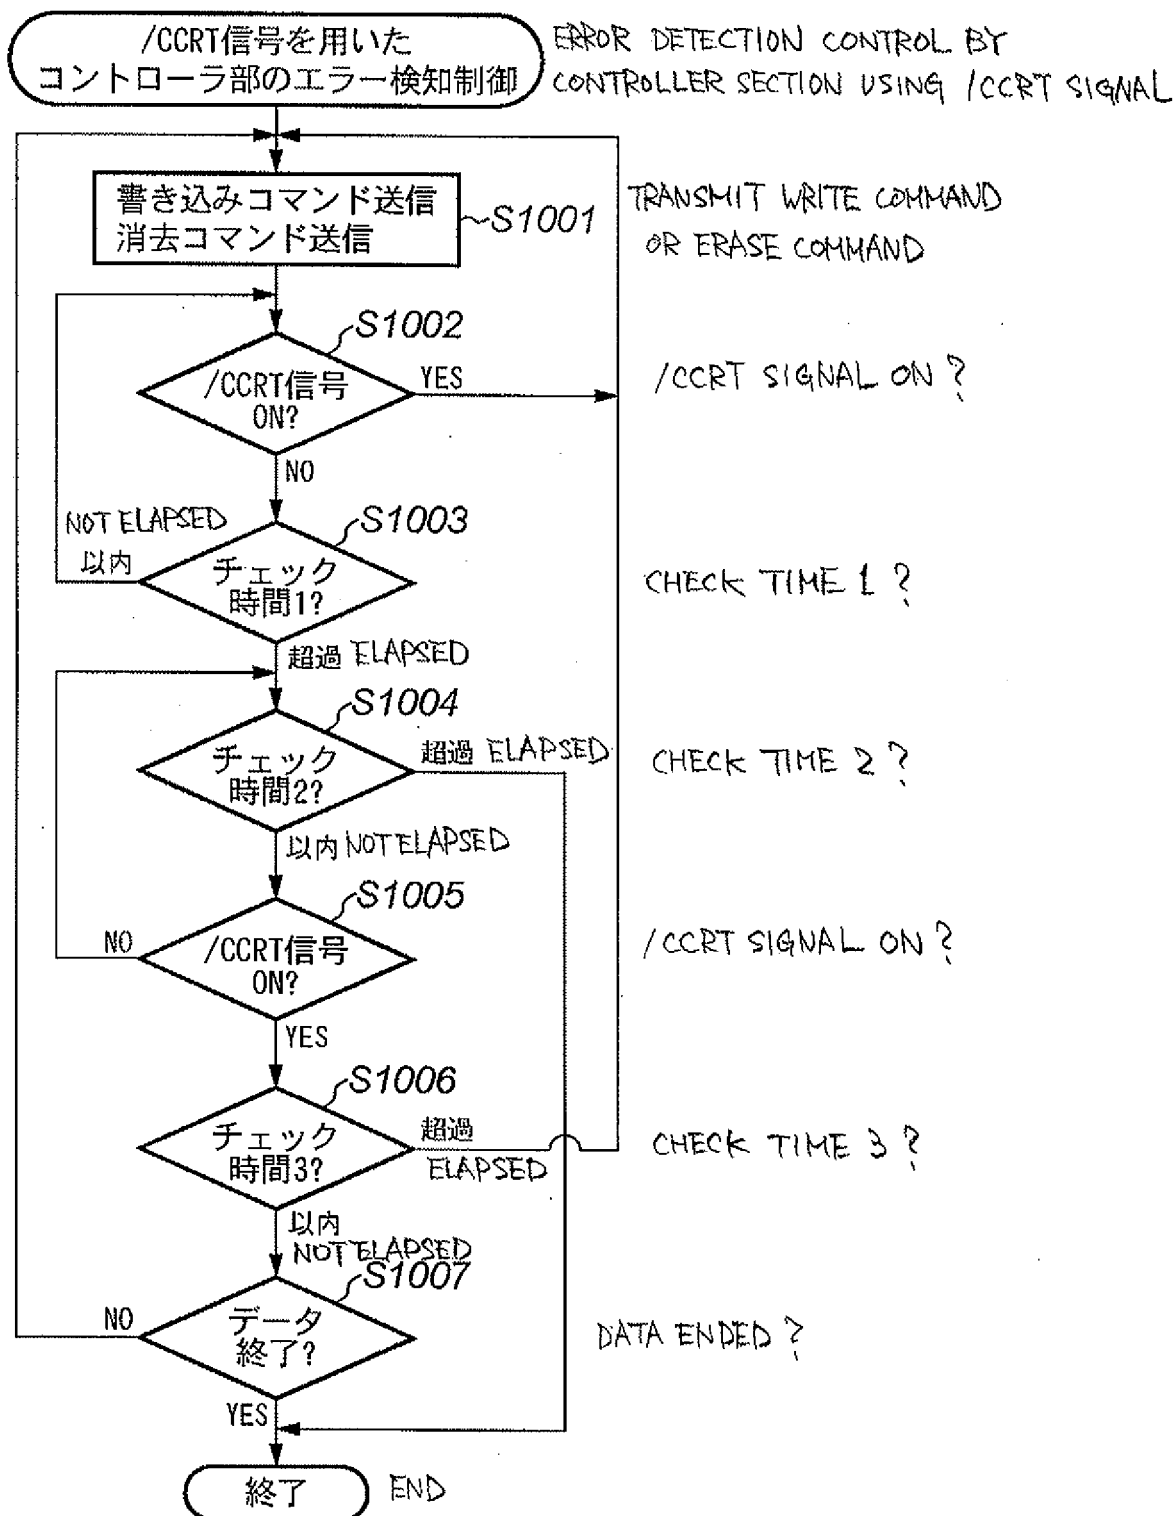


図10
Fig.10



FLASH REWRITE OPERATION
フラッシュ書き換え動作

図 11
Fig. 11

